


Technical Data

Shredder | Series | MiniShark MS3000

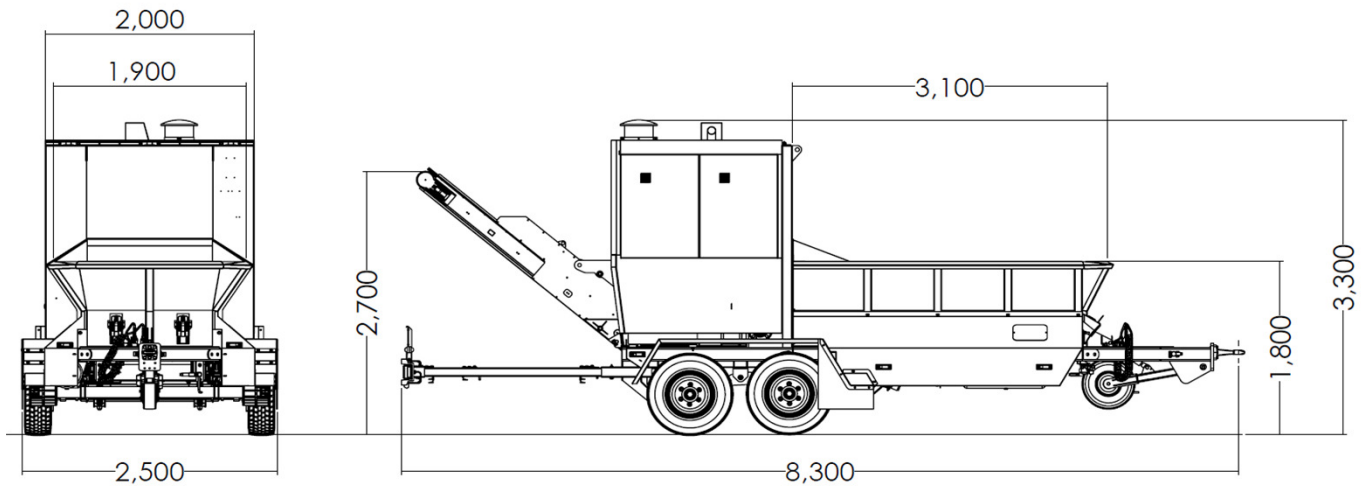

Transport Dimensions		l/w/h		8300/2500/3300
Motor				
Manufacturer		Perkins		
Type		1204F-E44T		
maximum Performance	kW/HP	130/176		
Cylinder Quantity	pieces	4		
Capacity	cc	4040		
Nominal Rotation Speed	rpm	2000		
Rotation Speed at maximal Torque	rpm	1400		
maximum Torque	Nm	750		
Emission		STAGE IV		
Fuel capacity	l	130		
AdBlue capacity	l	19		
Carriage		2-axle-central carriage, for 80 km/h according to StVZO		
Permissible Total Weight	kg	9000		
Rotor		#	flails	fixed tools (option)
Weight equipped	kg		approx 550	approx 400
Width	mm		1250	
Diameter	mm		700	
Rotation Speed	rpm		1500	870
Flails / Milling Stips / Scrapes left and right	pieces		18./.6./.0	22./.0./.4
maximal Infeed Hight	mm		300	
Endless Floor	#	speed adjustable continuously at the control box		
Infeed Roller	#	speed adjustable continuously on throttle		
Rakes and Screens	#	position adjustable with remote control		
Discharge Conveyor (rubber band)		#		
Dropping Height	mm	2750		
Width	mm	1250		
Speed	m/sec			

Shredder | Series | MiniShark MS3000

Outputs

Green Waste	m ³ /h	up to 35
-------------	-------------------	----------

Configuration

hydr. Hood Opening		●
Big one-piece Hood		●
Air brake system, with ABS		●
Drawbar Eye (50mm)		●
24 Voltage Lighting System, according to StVZO		●
Discharge Conveyor (rubber)	#	◦
Magnetic Guide Roller (Neodym)		◦
Crawler Drive	#	◦
Remote Control		◦
Central Lubrication		◦
hydr. Axle Extractor	#	◦
hydr. Support Wheel	#	◦
Reversible Fan	#	◦
Working Lights (3 pieces)	#	◦
Water Spray System		◦
Drawbar Eye Extension		◦
Special Paint		◦
Biological Oil		◦
Volume Measurement by Optical Scale System mounted on Discharger		◦
Diesel Particulate Filter		◦

- series
- option

all positions pointed out with # can be operate by optional remote control